



# Husky 3300 Pumps

A Complete Family of 3 inch (76.2 mm)  
Air-Operated Double Diaphragm Pumps



There are  
**NO EQUALS**

- Expanded material offering to handle numerous applications
- Flow rates up to 300 gpm (1,135 lpm)
- Modular stall-resistant air valve design

PROVEN QUALITY. LEADING TECHNOLOGY.

# HUSKY 3300 FAMILY

No Limits. No Equals. No Problem.



## Four Bolt Joint Design

Bolted design provides even sealing pressure for leak-free operation



## Modular Air Valve

Stall-resistant, efficient operation  
Quick replacement feature with easy four-bolt design




## Pilot Valves

Faster change over with spring loaded pilot valves  
Reduced pulsation  
Improved efficiency  
Externally serviceable

## Three-piece manifolds

Increased installation flexibility

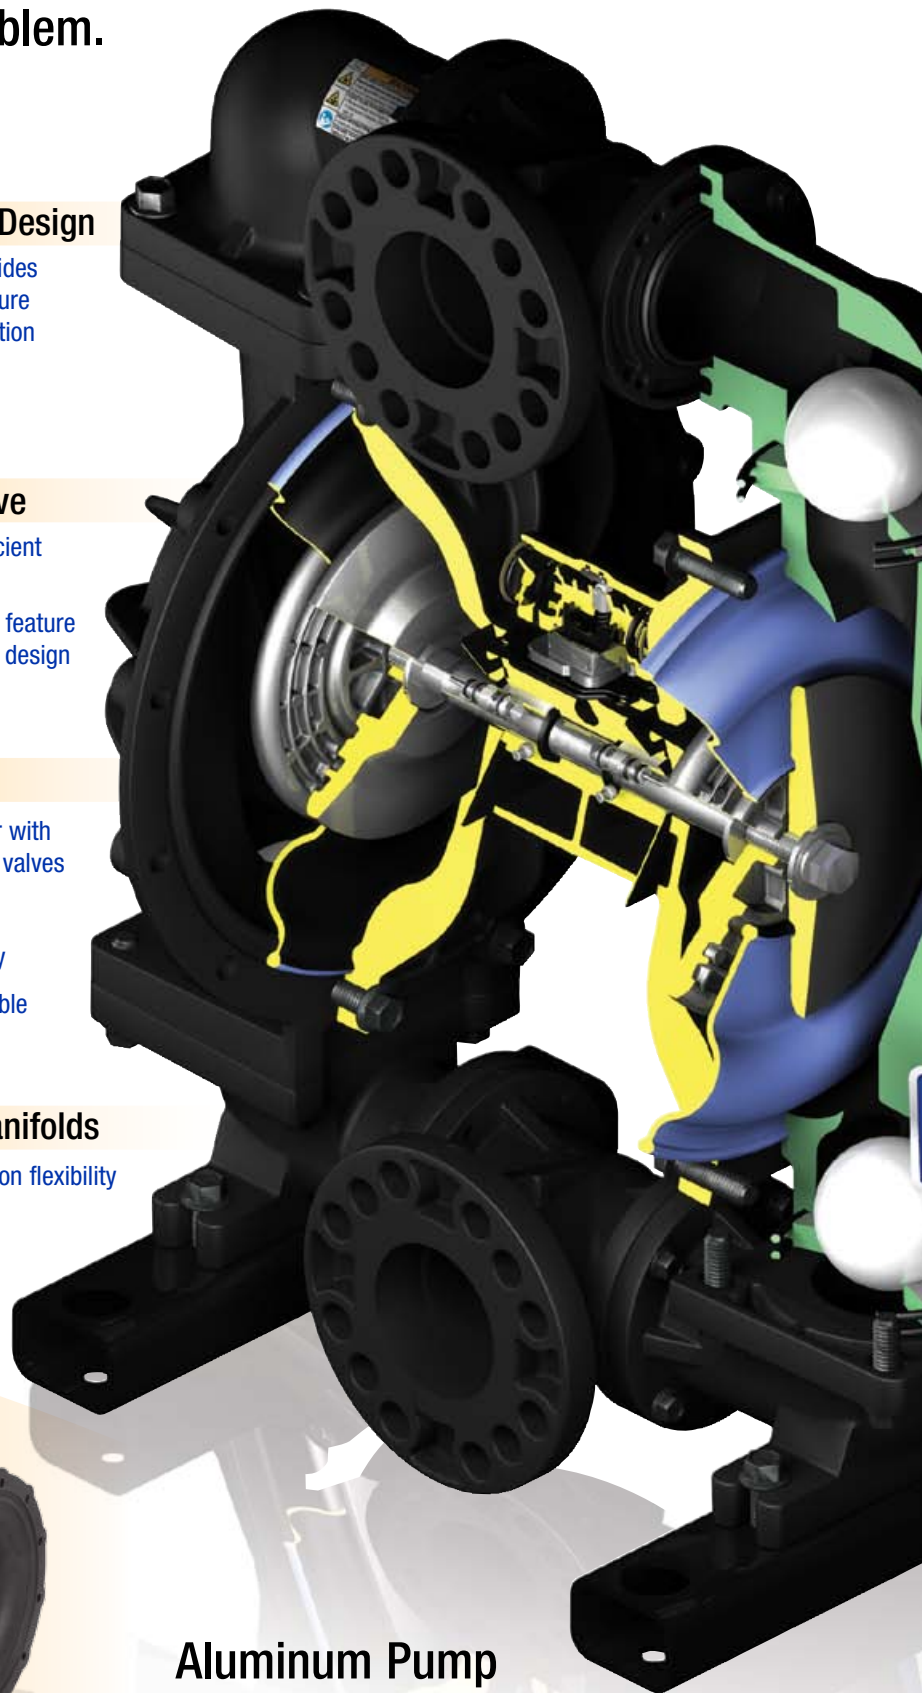

## Center Section Options



Aluminum



Polypropylene

## Aluminum Pump

Robust fluid section to handle the most abrasive applications



## Stainless Steel Pump

Corrosion free fluid section easily handles extreme environments



## Polypropylene Pump

Overmolded frame provides decreased joint relaxation and increased strength to virtually eliminate fluid leakage

## Find the Right Pump for your Application

Graco is making it easy to select a pump that's right for you.

To order a Husky 3300 pump, go to [www.graco.com/husky](http://www.graco.com/husky) to use the selector tool or contact your distributor.



Example of Product Selector Tool

## Want to schedule maintenance? Use DataTrak or Pulse Output!

- **DataTrak™**  
Ability to prevent pump runaway due to a damaged line or empty container  
Tracks material usage
- **Pulse Output**  
Cycle count capability



# Husky 3300 Technical Specifications

## Maximum fluid working pressure

- AL and SST with AL center sections ..... 125 psi (8.6 bar, 0.8 MPa)
- Poly and SST with poly center sections..... 100 psi (7 bar, 0.7 MPa)

## Air pressure operating range

- AL and SST with AL center sections ..... 20-125 psi (1.4-8.6 bar, 0.14-0.86 MPa)
- Poly and SST with poly center sections..... 20-100 psi (1.4-7 bar, 0.14-0.7 MPa)

## Maximum air consumption

- AL and SST with AL center sections ..... 335 scfm
- Poly and SST with poly center sections..... 275 scfm

## Air consumption at 70 psi (4.8 bar, 0.48 MPa),

- 100 gpm (378 lpm) ..... 90 scfm

## Maximum free-flow delivery

- Standard diaphragm ..... 300 gpm (1,135 lpm) at 125 psi (8.6 bar)
- Standard diaphragm ..... 280 gpm (1,059 lpm) at 100 psi (7 bar)
- Overmolded diaphragm ..... 270 gpm (1,022 lpm) at 125 psi (8.6 bar)
- Overmolded diaphragm ..... 260 gpm (984 lpm) at 100 psi (7 bar)

## Maximum pump speed

- Standard diaphragm ..... 103 cpm at 125 psi (8.6 bar)
- Standard diaphragm ..... 97 cpm at 100 psi (7 bar)
- Overmolded diaphragm ..... 135 cpm at 125 psi (8.6 bar)
- Overmolded diaphragm ..... 130 cpm at 100 psi (7 bar)

## Fluid displacement per cycle

- Standard diaphragm ..... 2.9 gal (10.9 liters)
- Overmolded diaphragm ..... 2.0 gal (7.5 liters)

## Maximum suction lift ..... 8 ft (2.4 m) dry, 28 ft (8.5 m) wet

## Maximum size pumpable solids ..... 0.5 in (12.7 mm)

## Sound Power\*

- at 50 psi (3.4 bar, 0.34 MPa) and 50 cpm..... 92 dBa
- at 120 psi (8.2 bar, 0.82 MPa) and full flow .... 99 dBa

## Sound Pressure\*\*

- at 50 psi (3.4 bar, 0.34 MPa) and 50 cpm..... 86 dBa
- at 120 psi (8.2 bar, 0.82 MPa) and full flow .... 93 dBa

## Air inlet size ..... 3/4 npt(f)

## Fluid inlet size

- Aluminum (3300A)..... 3 in npt(f) or 3 in bspt with 3 in ANSI/DIN flange
- Polypropylene (3300P) ..... 3 in raised face ANSI/DIN flange
- Stainless Steel (3300S) ..... 3 in npt(f) or 3 in bspt

## Fluid outlet size

- Aluminum (3300A)..... 3 in npt(f) or 3 in bspt with 3 in ANSI/DIN flange
- Polypropylene (3300P) ..... 3 in raised face ANSI/DIN flange
- Stainless Steel (3300S) ..... 3 in npt(f) or 3 in bspt

## Weight

- Aluminum (3300A)..... 150 lb (68 kg)
- Polypropylene (3300P) ..... 200 lb (90.7 kg)
- Stainless Steel (3300S) ..... 255 lb (115.6 kg)

## Wetted parts

- Aluminum (3300A)..... coated carbon steel, aluminum and material(s) chosen for seat, ball, and diaphragm options
- Polypropylene (3300P) ..... polypropylene and material(s) chosen for seat, ball, and diaphragm options
- Stainless Steel (3300S) ..... stainless steel and material(s) chosen for seat, ball, and diaphragm options

## Non-wetted external parts

- |                              | Center        | Bolts               |
|------------------------------|---------------|---------------------|
| Aluminum (3300A).....        | aluminum      | coated carbon steel |
| Polypropylene (3300P).....   | polypropylene | stainless steel     |
| Polypropylene (3300P).....   | aluminum      | stainless steel     |
| Stainless Steel (3300S)..... | polypropylene | stainless steel     |
| Stainless Steel (3300S)..... | aluminum      | stainless steel     |

## Operational Manual..... 3A0410

## Repair/Parts Manual ..... 3A0411

HUSKY MODELS










**205**  
1/4 in (6.3 mm)  
5 gpm (19 lpm)

**307**  
3/8 in (9.4 mm)  
7 gpm (26 lpm)

**515**  
1/2 in (12.7 mm) or  
3/4 in (19.1 mm)  
15 gpm (57 lpm)

**716**  
3/4 in (19.1 mm)  
16 gpm (61 lpm)

**1050**  
1 in (25.4 mm)  
50 gpm (189 lpm)

**1590**  
1-1/2 in (38.1 mm)  
90 gpm (340 lpm)

**2150**  
2 in (50.8 mm)  
150 gpm (568 lpm)

**3300**  
3 in (76.2 mm)  
300 gpm (1,135 lpm)

FEATURED PUMP

\* Sound power measured per ISO-9614-2

\*\* Sound pressure was tested 3.28 ft (1 m) from equipment

All written and visual data contained in this document are based on the latest product information available at the time of publication. Graco reserves the right to make changes at any time without notice.

Call today for product information or to request a demonstration.  
**877.84GRACO** (1-877-844-7226) or visit us at [www.graco.com](http://www.graco.com).



# **HOLDFAST**

**FLUID POWER**

***Forrestfield***

657 Dundas Road,  
Forrestfield WA 6058

Phone: 1300 HOLDFAST  
Phone: (08) 9359 1795  
Fax: (08) 9359 1792  
Email: [sales@holdfastaust.com.au](mailto:sales@holdfastaust.com.au)

***Broome***

10/274 Port Drive,  
Broome WA 6725

Phone: 1300 HOLDFAST  
Phone: (08) 9192 6007  
Fax: (08) 9192 6067  
Email: [salesnw@holdfastaust.com.au](mailto:salesnw@holdfastaust.com.au)

***Naval Base***

1/27 Dooley Street  
Naval Base WA 6165

Phone: 1300 HOLDFAST  
Phone: (08) 9410 0716  
Fax: (08) 9410 1152  
Email: [sales2@holdfastaust.com.au](mailto:sales2@holdfastaust.com.au)

**1300 HOLDFAST**