

G3™ Electric Lubrication Pump

For Series Progressive and Injector-based Systems



Versatile Design Helps Solve Today's Lubrication Challenges

Temperature changes, changing grease types and challenging installation requirements are no problem for the G3 electric lubrication pump. With its flexible design, including five reservoir sizes, three controller options, three power types and an adjustable pump element, the G3 is a rugged, cost-effective pump designed to serve multiple markets and applications.



PROVEN QUALITY. LEADING TECHNOLOGY.

If You're Not Using **Graco G3™** Pumps, You're Not **Maximizing** Your **Profits.**



Rigorously tested to pass Graco specifications and earn these approvals—
we'd love to have yours, too.



IP69K

Contact Us Today!

To receive product information or to speak with a Graco representative, call 800-533-9655
or for a complete list of G3 Pumps and configurations visit us online at www.graco.com.

Versatile Design Helps Solve Today's Lubrication Challenges.



Why G3™ is Better

Two in One Design Does More!

G3's flexible design works with injector-based and series progressive systems. A cost-effective pump designed to serve multiple markets and applications.

Options that Fit Your Business

Three controllers to choose from with multiple zone and feedback options. Includes one adjustable pump element—standard, plus room for two more. Multiple reservoir choices and more! The ultimate in flexibility—for a high value, custom fit on your application.

Built-in Tools to Help You Succeed

Work faster and smarter with Graco's exclusive Data Management System (DMS™). Find out exactly how your lubrication system is performing and how well it's lubricated. Tracks history, provides data protection, upload or download data using a simple USB flash drive.

World Wide Support with Experienced Professionals

Graco wants to help you become more successful. Our staff of professional engineers, designers, field experts and customer service representatives are at your service. We invite you to call on us to partner in your next project.

Extend Machinery Life, Reduce Operating Costs and Increase Productivity with a Graco G3™ Today!

Take a Look Inside – We Think You'll Like What You See.

Designed from the inside-out for longer lasting performance and reliability. G3 meets changing temperatures, challenging installation requirements and changing grease types head-on. Graco's newest electric pump delivers high performance results in real world application conditions.




Advanced Flow Dynamics

Specially contoured base funnels grease directly to the pump inlet to significantly reduce stagnant flow areas where soaps and grease fillers can accumulate.



Adjustable Stroke Pump

With G3, adjustability comes standard! Eliminate the need to purchase additional fixed output elements or high-priced adjustable elements.



Load Minimizing Drive

Each G3 piston pump element is offset from the main motor shaft resulting in less stress on the motor and internal components.

Versatile, Hard-working Pump

Designed for You to Succeed

Two Reservoir Types

Stirring paddle with wiper arm to keep material from separating. Follower plate available for extreme angle installations.

Multiple Reservoir Sizes

Choice of 2, 4, 8, 12 or 16 liter U.V. resistant, high-impact reservoirs for oil and grease to meet the needs of your equipment.

Power Choices

Connect to DC (12 or 24V) and AC (90-240V) power sources with CPC or DIN-style connectors for easy, no hassle installations.

Three Pump Elements

G3 comes standard with one adjustable pump element installed – add up to two more for higher output on large projects.

Vent Valve Output

Combine Max controller with a vent valve for injector-based systems.

Multiple Cycle and Pressure Inputs

Mix and match up to three cycle and pressure switches for custom installations and feedback.

Four Controller Options

Choose from Standard, Pro, SP and Max controller options – buy only what you need for your application.

Machine Count Input

Machine count input to manage equipment with unpredictable lubrication requirements.



Data Management System (DMS)

- Simple data transfer to your PC via USB flash drive for further analysis using Excel® or Notepad®
- Provides performance history for lube system events, such as cycle detection, error logs and allows a quick check of lubrication performance to meet your system requirements
- Preferred lube cycle program can be stored and transferred to other G3 pumps in your fleet for quick and accurate repeatability
- Provides you the comfort and security in knowing your pump is being properly maintained and your lube system is protecting your valuable asset



Auto-Fill Shutoff (AFSO)

- Available on G3 Standard, Pro and Max
- Eliminates over- or under-filling
- Completely fill the reservoir every time while avoiding costly spills
- Does not require power to operate
- Complies with stringent mining regulations where a system must be powered down during fluid refilling
- Compatible with fast-fill-equipped lubrication trucks
- Reservoir Full Visual Indication
- Valve Plate activates a poppet valve, which cuts off grease flow into the reservoir

Control for Your Business

Standard, Pro, SP and Max

Choose the level of control you need for your series progressive or injector based applications.

G3 Standard

- No internal controller – use with separate or existing machine control for a low cost solution
- Capable of sending a low level signal to your external controller or PLC



G3 Pro

- Built-in controller with selectable pump on/pump off timer
- Low level indicator provides low warning and shut-down alarm
- Manual run initiates lube cycle on-demand (remote option also available)
- Password protection safeguards settings
- Pre-lube function can initiate lube cycle on start-up



G3 SP

- Simple programming and valuable system feedback
- Low level indicator provides low warning and shut-down alarm
- Only programming requirements are number of cycles and off time between lube events
- Manual run initiates lube cycle on-demand (remote option also available)
- Password protection safeguards settings
- Pre-lube function can initiate lube cycle on start-up



G3 Max

- Built-in controller with selectable pump on/pump off timer
- Low level indicator provides low warning and shut-down alarm
- Manual run initiates lube cycle on-demand (remote option also available)
- Password protection safeguards
- Pre-lube function can initiate lube cycle on start-up
- Up to three pressure or cycle switch inputs to ensure proper lubrication cycles
- Mix/match cycle and pressure switches for custom installations and feedback
- Machine count input – ideally suited for inconsistently used equipment
- Fault indication to external alarms
- Optional Data Management System™ (DMS)



Check Out the Full-featured G3 Max



- 1 Easy-to-read LED display
- 2 Clearly identified pump on/off indication
- 3 Monitoring of up to three independent zones
- 4 Programmable machine count feature
- 5 Alarm signal of lube system shutdown
- 6 Warning signal prior to lube system shutdown
- 7 Low level indication
- 8 Password protected access to control
- 9 Pre-lube capability
- 10 Easy-to-use navigation keys

Technical Specifications

| | |
|---|--|
| Maximum Working Pressure | 5,100 psi (352 bar) |
| Power | 12 VDC, 24 VDC, 90-240 VAC |
| Operating Temperature | -40 to 158° F (-40 to 70° C) depending on lubricant used |
| Reservoir Size | 2, 4, 8, 12 or 16 liter |
| Adjustable Pump Output Per Element Per Minute | 0.12 in ³ , 0.18 in ³ , 0.25 in ³ (2 cm ³ , 3 cm ³ , 4 cm ³) |
| Lube Type | Oil or Grease, up to NLGI #2 |
| Certifications/Ratings | CE, ETL*, IP69K *Conforms to UL 73, certified to CSA 22.2 No. 68-09 |
| Instruction Manuals | Standard - 332291 / Pro - 332298 SP - 3A4676 / Max - 332305 |

AMERICAS

MINNESOTA

Worldwide Headquarters
Graco Inc.
88-11th Avenue N.E.
Minneapolis, MN 55413

MAILING ADDRESS

P.O. Box 1441
Minneapolis, MN 55440-1441
Tel: 612-623-6000 Fax: 612-623-6777

EUROPE

BELGIUM

Graco BVBA
Industrieterrein-Oude Bunders
Slakweidestraat 31
B-3630 Maasmechelen,
Belgium
Tel: 32 89 770 700 Fax: 32 89 770 777

ASIA PACIFIC

AUSTRALIA

Graco Australia Pty Ltd.
Suite 17, 2 Enterprise Drive
Bundoora, Victoria 3083
Australia
Tel: 61 3 9468 8500 Fax: 61 3 9468 8599

CHINA

Graco Hong Kong Ltd.
Shanghai Representative Office
Building 7
1029 Zhongshan Road South,
Huangpu District
Shanghai, 200011
The People's Republic of China
Tel: 86 21 649 50088 Fax: 86 21 649 50077

INDIA


Graco Hong Kong Ltd.
India Liaison Office
Room 443, Level 4
Augusta Point, Golf Course Road
Gurgaon, Haryana, India 122001
Tel: 91 124 435 4208 Fax: 91 124 435 4001

JAPAN

Graco K.K.
1-27-12 Hayabuchi
Tsuzuki-ku
Yokohama City, Japan 2240025
Tel: 81 45 593 7300 Fax: 81 45 593 7301

KOREA

Graco Korea Inc.
Shinhan Bank Building
4th Floor #1599
Gwanyang-Dong, Dongan-Ku,
Anyang-si, Korea 431-060
Tel: 82 31 476 9400 Fax: 82 31 476 9801

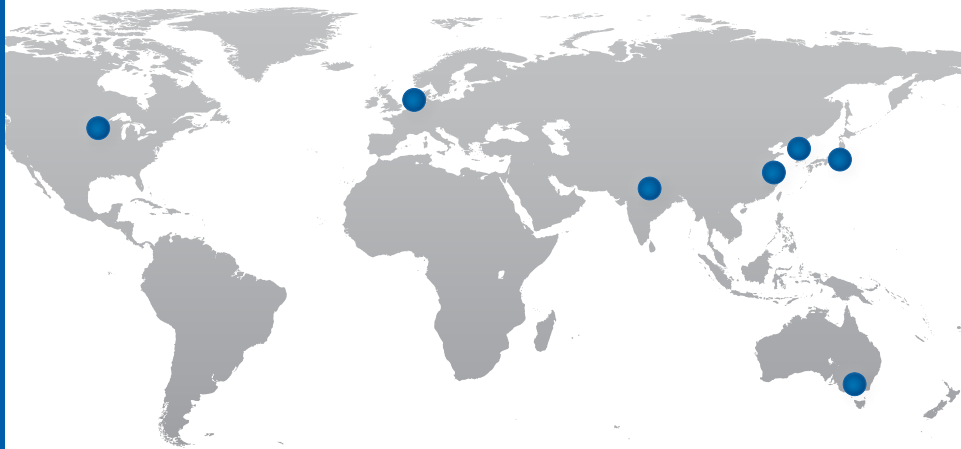

Graco's got you covered

Facilities Worldwide for Global Support



Quality First

At Graco we pride ourselves on providing best-in-class products. Engineered solutions are manufactured in our own facilities, with the highest standards in the industry. We provide you with world-class customer support and expertise to help solve your lubrication challenges.



Global Reach

Graco has facilities and distribution partners across the globe to provide you with the products and service *you* need, where *you* live. Plus, Graco has dedicated field experts in all areas of the world to support the products we sell.



Product Capabilities

Graco has a broad range of products to provide solutions that meet your needs. Our products are engineered and tested to perform in the harshest environments so you can be certain your equipment is protected and working at peak performance.

Contact us today!

Call **800-533-9655** to speak with a Graco representative,
or visit **www.graco.com** for more information.



HOLDFAST

FLUID POWER

Forrestfield

657 Dundas Road,
Forrestfield WA 6058

P: (08) 9359 1795

F: (08) 9359 1792

E: sales@holdfastaust.com.au

Broome

10/274 Port Drive
Broome WA 6725

P: (08) 9192 6007

F: (08) 9192 6067

E: salesnw@holdfastaust.com.au

Naval Base

1/27 Dooley Street,
Naval Base WA 6165

P: (08) 9410 0716

F: (08) 9410 1152

E: sales2@holdfastaust.com.au

1300 HOLDFAST